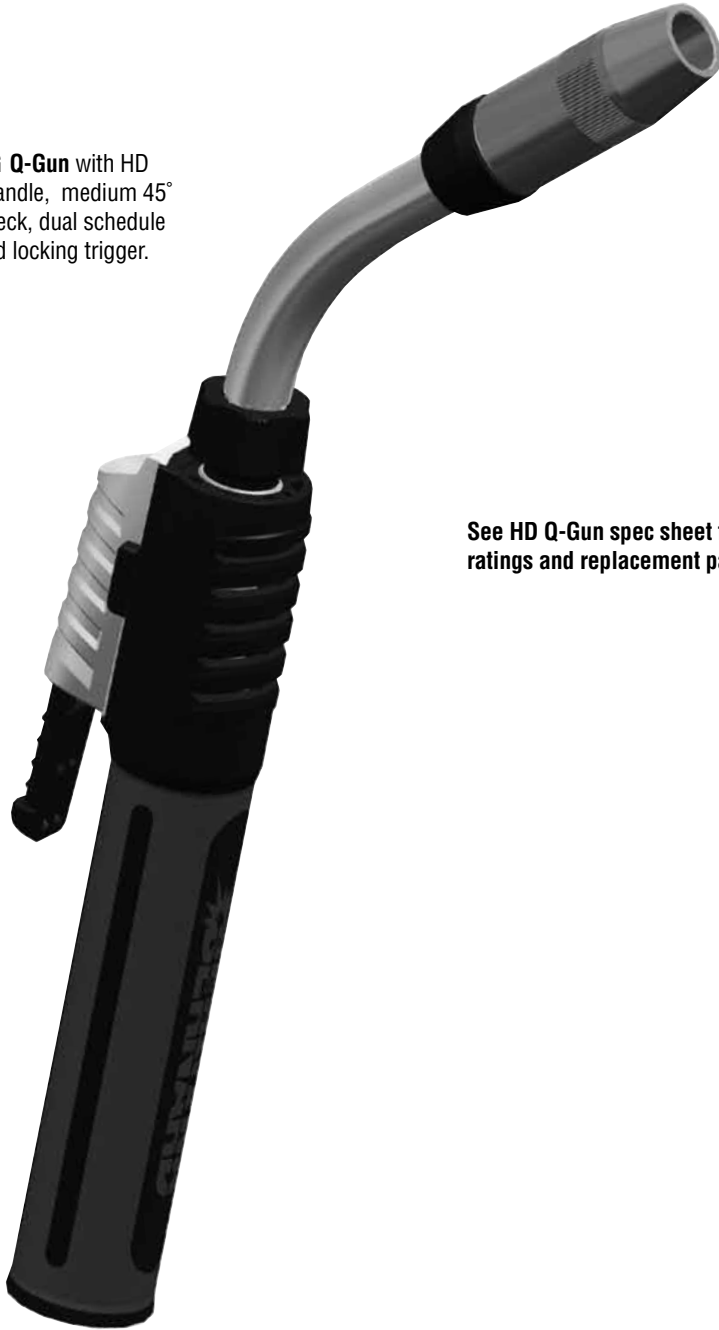


HD Q™ and S™ Series

MIG Gun Configurator

Issued Jan. 2009 • Index No. HDQSCON 1.1

Q400 MIG Q-Gun with HD straight handle, medium 45° rotating neck, dual schedule switch and locking trigger.



See HD Q-Gun spec sheet for ratings and replacement parts.

All Guns are Not Created Equal.

A MIG gun should be durable, easy to use and customized to your specific application. Our MIG guns put you in control: you choose the options you need and we'll build a gun to last. We even ship most of our guns within 24 hours.

MIG gun configurator allows easy, precise customization of just the right HD Q-Gun or S-Gun for your welding job.

Amperage ratings at 100% duty cycle with CO₂ gas: 300, 400, 500 and 600 amps.

Power cables available with high flex standard or steel monocoil conduits and in lengths to fit any application.

Dual Schedule switch can be coupled with standard locking trigger, allowing guns to be performance matched to user preference.

Necks available in fixed, rotatable and numerous length options to improve operator comfort.

Contact tip options include Centerfire™, Elliptical and Quik Tip™ and are available in wire sizes from .023" (0.6 mm) to 1/8" (3.2 mm).

Direct plugs and trigger leads connect to wire feeders and machines from all major manufacturers and are easily interchangeable to allow simple maintenance.

Made with
Pride and without
Compromise in the **USA**

Bernard®

An Illinois Tool Works Company
449 West Corning Road, Box 667
Beecher, Illinois 60401 USA

Phone: 800-946-2281 (US Only) 708-946-2281 (Outside US)
Fax: 708-946-6726
For more information, visit us at BernardWelds.com



Time to Choose

Q-Gun™ Part Number

The part number shown here, **Q4015WE8EM**, is an example of a typical configuration. It consists of a 400-amp Q-Gun with a 15' cable, HD straight handle, standard locking trigger, rotatable medium 45° neck, Centerfire™ 0.045" contact tip and Miller-style direct plug.



Q40

15

W

Amp and Cable Type

| | |
|------------|---|
| Q30 | 300 amp <i>max. wire size: 5/64" (2.0 mm)</i> |
| Q40 | 400 amp <i>max. wire size: 5/64" (2.0 mm)</i> |
| Q50 | 500 amp <i>max. wire size: 3/32" (2.4 mm)</i> |
| Q60 | 600 amp <i>max. wire size: 1/8" (3.2 mm)</i> |
| S30 | 300 amp Steel "Monocoil" <i>max. wire size: 5/64" (2.0mm)</i> |
| S40 | 400 amp Steel "Monocoil" <i>max. wire size: 5/64" (2.0mm)</i> |
| S50 | 500 amp Steel "Monocoil" <i>max. wire size: 3/32" (2.4 mm)</i> |
| S60 | 600 amp Steel "Monocoil" <i>max. wire size: 1/8" (3.2 mm)</i> |

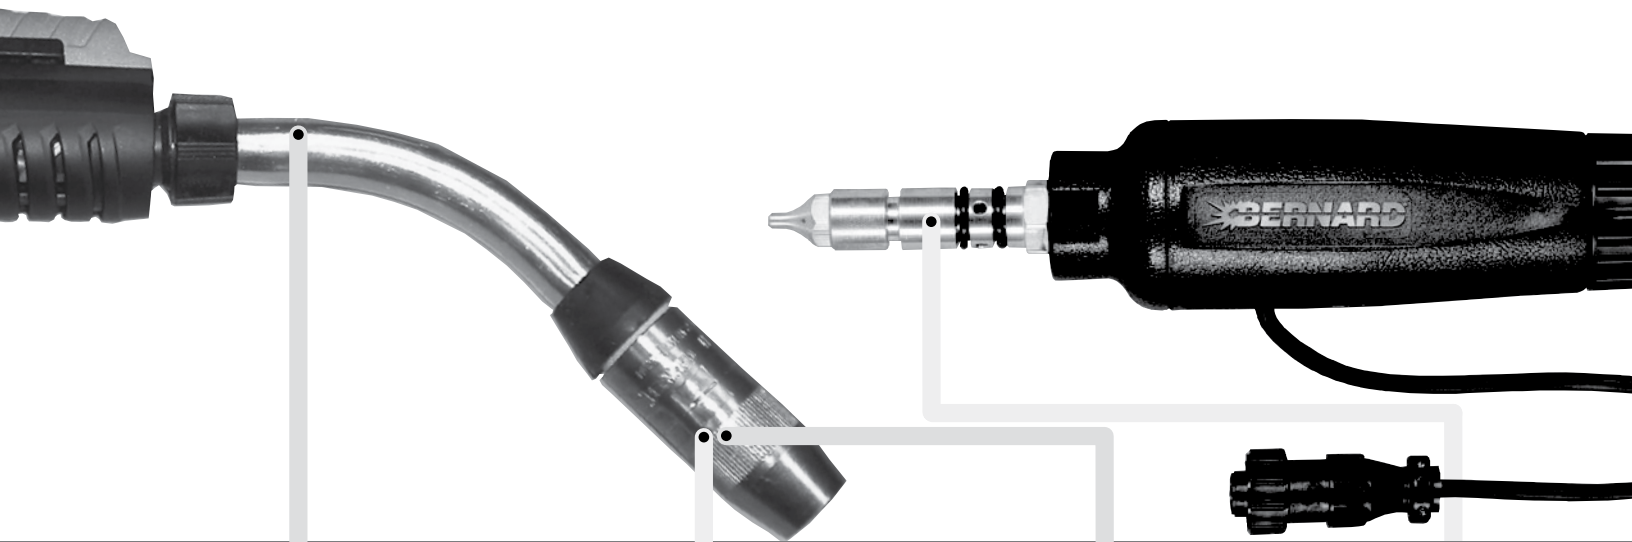
Cable Length

| | |
|-----------|----------------|
| 08 | 8 ft (2.44 m) |
| 10 | 10 ft (3.05 m) |
| 12 | 12 ft (3.66 m) |
| 15 | 15 ft (4.57 m) |
| 20 | 20 ft (6.16 m) |
| 25 | 25 ft (7.63 m) |

Handle and Trigger

| | |
|---|--|
| 300-600 Amp HD Straight Handle | W Standard Locking Trigger |
| Standard or Steel Monocoil Cable | X Dual Schedule Switch w/ Lock |

Your Weapon.







E

8

E

M

| Neck | | | |
|----------|-------------------|-----|--------|
| A | Rotatable, Short | 30° | QT2-30 |
| B | Rotatable, Short | 45° | QT2-45 |
| C | Rotatable, Short | 60° | QT2-60 |
| J | Rotatable, Short | 80° | QT2-80 |
| D | Rotatable, Medium | 30° | QT3-30 |
| E | Rotatable, Medium | 45° | QT3-45 |
| F | Rotatable, Medium | 60° | QT3-60 |
| K | Rotatable, Medium | 80° | QT3-80 |
| G | Rotatable, Long | 30° | QT5-30 |
| H | Rotatable, Long | 45° | QT5-45 |
| I | Rotatable, Long | 60° | QT5-60 |
| N | Fixed, Short | 30° | QT2-30 |
| O | Fixed, Short | 45° | QT2-45 |
| P | Fixed, Short | 60° | QT2-60 |
| W | Fixed, Short | 80° | QT2-80 |
| Q | Fixed, Medium | 30° | QT3-30 |
| R | Fixed, Medium | 45° | QT3-45 |
| S | Fixed, Medium | 60° | QT3-60 |
| X | Fixed, Medium | 80° | QT3-80 |
| T | Fixed, Long | 30° | QT5-30 |
| U | Fixed, Long | 45° | QT5-45 |
| V | Fixed, Long | 60° | QT5-60 |

| Contact Tip | |
|-------------|---|
| 8 | Centerfire™  |
| 7 | Elliptical, 7400 series, 1.25" long, std.  |
| 5 | QuikTip™  |
| 1 | Elliptical, 1500 series, 2.00" long, HD  |

| Wire Size | |
|--------------------|-----------------|
| A | .023" (0.6 mm) |
| B | .030" (0.8 mm) |
| C | .035" (0.9 mm) |
| D | .039" (1.0 mm) |
| E | .045" (1.2 mm) |
| H | .052" (1.4 mm) |
| I | 1/16" (1.6 mm) |
| K | 5/64" (2.0 mm) |
| L | 3/32" (2.4 mm) |
| M | 7/64" (2.8 mm) |
| N | 1/8" (3.2 mm) |
| Aluminum Wire Size | |
| Q | .035" (0.9 mm) |
| R | 3/64" (1.19 mm) |
| S | 1/16" (1.6 mm) |

| Direct Plug | |
|-------------|--|
| B | Bernard® |
| E | Euro® |
| H | Hobart® |
| L | Lincoln® |
| M | Miller® |
| N | National® |
| O | OXO® |
| S | Tweco® 4 (Lincoln lead) |
| T | Tweco® 4 (std. lead) |
| U | Tweco® 4 (two prong twist-lock lead) |
| W | Tweco® 5 (std. lead) |

See back page for help selecting direct plug.

Typically selected necks by amperage:
300 - 400 amp QT3-45
500 - 600 amp QT5-60

| Amp | Centerfire™ Tips | | Elliptical Tips | | Quik Tips™ | | |
|---------|------------------|----------|-------------------------------|-------------------------------|------------|----------|---------|
| | Diffuser | Nozzle | Diffuser (7400 series tip) | Diffuser (1500 series tip) | Nozzle | Diffuser | Nozzle |
| 300 amp | DS-1 | NS-5818C | 4335-116 | 4235-116 | 4393 | D118Q | N1C58Q |
| 400 amp | D-1 | N-5818C | 4435 | 4635-116 | 4591 | D118Q | N1C58Q |
| 500 amp | D-1 | N-5814C | 4435 | 4635 | 4591HD | D114Q | N1C34HQ |
| 600 amp | D-1 | N-3414C | 4435 | 4635 | 4591HD | D114Q | N1C34HQ |

Bernard Q-Guns and S-Guns are fitted at the factory with the diffusers and nozzles in the table above.

Direct Plug Options That Work

Get the right connection to fit your wire feeder

Below is a list of wire feeders that connect with Bernard Q-Gun and S-Gun direct plugs. Feeder connections not listed here can often be addressed by the wide variety of available Bernard adapter kits. Contact us for more information.

| Direct Plug | Manufacturer | Model | |
|--------------------|--|--|---|
| B Bernard® | Adapts to most feeder makes and models. Examples below. Refer to <i>Bernard EZ Feed Quick Connect Feeder End Kits Ordering Guide</i> for more information. | | |
| | Miller® | 10 Series, 10E, 30 Series, 30A, 30B, 30E, 70 Series, 70A, 80 Series, 80A, MM10A, XRA; with <i>Bernard Adapter Kit 4983</i> Migman 105; with <i>Bernard Adapter Kit 4920G</i> 35S, MM35S (with 3/4" bore only); with <i>Bernard Adapter Kit 4970F</i> MM35 (with 3/8" bore only); with <i>Bernard Adapter Kit 4970F</i> | |
| | OTC® | Most models, including CM-145, CM-146, CM-147, CM-231, CM-747, DynaAuto; with <i>Bernard Adapter Kit 4820P</i> CMUS-511; with <i>Bernard Adapter Kit 4820G</i> | |
| | E Euro | All Models | |
| E | CEA® (USA & Europe) | EuroFil 210, MaxiCompact 300, Monofil 201, Monofil 251 Migmate, TE 904RC, TR 80, TR 90, WF 104 | |
| | Cebora® | Jaguar 181, Jaguar 203, Jaw Feed, MIG 175, MIG 253C | |
| | CEMIG® | PD10, PD20, PD30 | |
| | Cemont® | MX 200S, WX 1705 | |
| | ESAB®, Airco®, L-Tec® | ME-2, MigMaster 180, DigiMIG Dual, DigiPlus, DigiPulse, Dip/Stick 160, DipPak 250, DipPak 300, Med 20, Med 40, MIGhty, MIGhty 4HD, MIGhty V, Universal V, MIG 2E, MIG 4HD, MigMaster 250, MigMaster 300L | |
| | Esseti® | Macro 350, Macro 400, Macro 500, MT 1, MT 2, Unimacro 500 | |
| | Gelco® | All Models | |
| | Hansen Mig® | HH0250 | |
| | Lincoln® | SP250, SP253 | |
| | Nu-Tecsys® Corp | Omni Mig, OMNI-MIG160, OMNI-MIG325 | |
| | Thermal Arc® | TAF-2, TAF-4 | |
| | Trexim Sri® | MidiMig 140 | |
| | H Hobart® | Hobart® | Hobart Dual, 17 |
| | L Lincoln® | Lincoln® | LN-23-P, LN-25, LN-7 (2 & 4 Drive), LN-742, LN-742H, LN-9, LN-9 GMA, Synergic 7 |
| M Miller® | Hobart® | IronMan 210, IronMan 250 | |
| | Miller® | Most models including: 60M, Cricket, Cricket XL, D-60, D-62, D-64; Millermatic 120, 130, 135, 150, 175, 185, 210, 250, 250MP, 90, Vintage; R-115, S-21E, S-22A, S-22P-12, S-22P8, S-300 Series (S-325), S-32P, S-32P-12, S-32P-8, S-32S, S-32SL, S-44GL, S-50 Series, S-60 Series, S-70 Series, Sidekick, Sidekick XL, Suitcase Feeders, SwingArcs | |
| | <i>Does not fit:</i> | <i>10 Series, 10E, 30 Series, 30A, 30B, 30E, 35, 35S, 70 Series, 70A, 80 Series, 80A, Migman 105, MM10A, MM35, MM35S, XRA (See Bernard Direct Plug for adaptor options)</i> | |
| | Olympic® | 22-P, VS | |
| N National® | Kobelco® | All Models | |
| | National® | Most models | |
| | Panasonic® | All Models | |

| Direct Plug | Manufacturer | Model |
|---|--------------|--|
| O OXO® | | AVC-8Q, AVC-30Q |
| S TWECO® 4 (Lincoln® style lead) | Lincoln® | DH-10*, LN-10*, Power Feed 10*, Power Feed 10 Dual*, PRO 10*, STT10 |
| | ESAB® | MobileMaster |
| T TWECO® 4 (with 1/4" male spade leads) | Hobart® | Model 17, Digital 2000, Digital 2200 series, Migit 17, 2410, Beta-Mig 250, BetaMig 251, Dual-Digital, HMC-140, PortaFeed 1000, Pro Feed 412, Ultra Feed 1000, Beta-Mig 170, HMC-410, PortaFeed 17, Ultra-Feed 1000, Porta-Wire CC/CV |
| | Lincoln® | SP85, SP100, SP100T, SP125T, SP130T, SP160, SP170T, MigPak 10 and 55, WeldPak 100 PowerMig 255 and 300, SP 170, Wirematic 250 and 255, WeldPack 100 |
| | OTC® | CMUS-511 |
| | Pow Con® | PDP 1, PDVS1, Power Drive 1E |
| | Systematics® | FW112 (Air Products®) |
| | Thermal Arc® | 180 GM, 210 GM, 250 GM, Digital 2000, Dual Digital 2000 |
| U TWECO® 4 (two prong twist-lock lead) | ESAB® NAS | MultiMaster 260, DuraDrive 4-30, DuraDrive 4-48 |
| W TWECO® 5 (with 1/4" male spade leads) | | Feeders adapted to TWECO® style 3/4 dia power pin. |

* Feeder manufacturer offers different gun receiver bushings that will change the direct plug required. Please call for more information.

Supplemental technical information for Bernard direct plugs can be found in the *Direct Plug Kits Spec Sheet*.

Bernard® is the registered trademark of Illinois Tool Works Inc. Other brands mentioned are for reference only and are the registered trade marks of their respective companies. Illinois Tool Works Inc. is not affiliated with these other companies.



449 West Corning Road, Box 667
Beecher, IL 60401-0667 USA

Phone (US Only): 800-946-2281
Phone (Outside US): 708-946-2281
Fax: 708-946-6726

Web Site: www.bernardwelds.com
E-mail: info@bernardwelds.com
Order Tracking: www.myweldorder.com